

# ALTA PRO

A versatile “work horse” segmental retaining wall. Tapered to allow for easy installation and outside curves. An attractive wall for all landscaping designs. 32 sq. ft. per pallet

Wall Systems

- HARD SPLIT ROCK TEXTURE
- REAR LIP CONNECTION SYSTEM
- TAPERED SIDES
- 1" SETBACK PER COURSE
- HOLLOW CORE
- GRID CHARTS AVAILABLE



Alta Pro shown in Charcoal/Buff

# ALTA PRO

## DIMENSIONS

	width	length	height	s.f./pcs.	s.f./pallet	pcs./pallet	lbs./pallet
<b>a</b>	18"	12"	8"	1	32	32	2,448
<b>b corner</b>	18"	9"	8"	1	32	32	2,800

Available colors:



Beige/Brown



Charcoal/Buff



Charcoal/Grey



Charcoal/Red





Alta Pro



8" corner  
also sold  
separately




OUTSIDE RADIUS DETAIL  
NICOLOCK ALTA PRO WALL

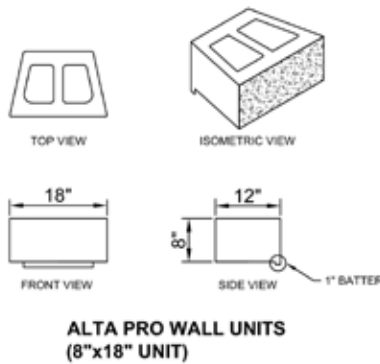

## NICOLOCK ALTA PRO - TYPICAL GRAVITY CROSS SECTION MAXIMUM UN-REINFORCED WALL HEIGHT IS 36" UNDER IDEAL CONDITIONS

**NOTE:** Maximum exposed height for gravity walls is 36" under ideal conditions. Soil type, crest slopes and surcharges will decrease max exposed height for gravity walls. Consult a professional engineer to determine site and specific colors

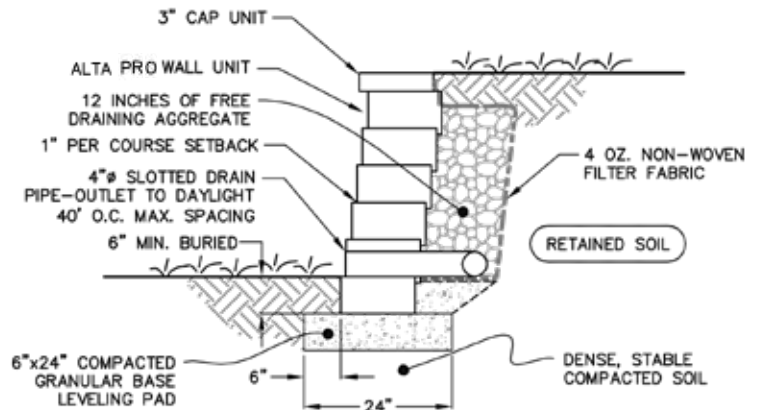

**NOTE:** All walls over 2' in height or as required by local code should be designed by a licensed professional engineer. All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

