

BLUERIDGE



RUSTY BLUE BLEND (Random)



FORTIFIED WITH:
paver-shield[™]
guaranteed protection



nicolock.com

nicolock[®]
paving stones & retaining walls




new york • new jersey • new england • maryland

BLUERIDGE

Manufactured by:
NICOLOCK[®]
 paving stones & retaining walls

Features

- Multi-size rectangular shapes • Textured riven surface
- Slightly chamfered edges • Not recommended for vehicular traffic

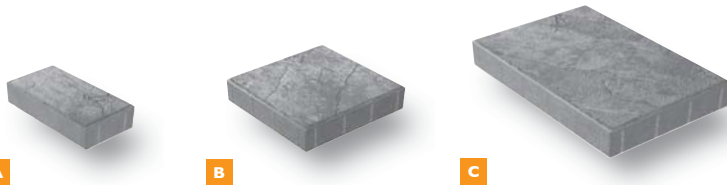

**ADD
 RIDGE CIRCLE
 TO YOUR
 DESIGN!**

Color Selections



adobe blend

golden brown blend



granite city blend

westchester blend



caramel tan*

crab orchard blend*



oyster blend*

pennsylvania blue blend**



rusty blue blend**

* denotes premium color
 ** denotes deluxe color

Specifications


	width	length	thickness	pcs./s.f.	s.f./pallet	pcs./pallet	lbs./pallet
A	7-3/4"	15-5/8"	2-3/8"		106	30	2,968
B	15-5/8"	15-5/8"	2-3/8"		-	30	-
C	15-5/8"	23-5/8"	2-3/8"		-	20	-

Sizes not sold separately.

INSTALLATION GUIDELINES: SAND

After excavation, compact the subgrade and install a woven separation fabric. Spread and compact a base of clean, graded, dense aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screeded 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" - 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints.

CROSS-SECTION OF TYPICAL INSTALLATION

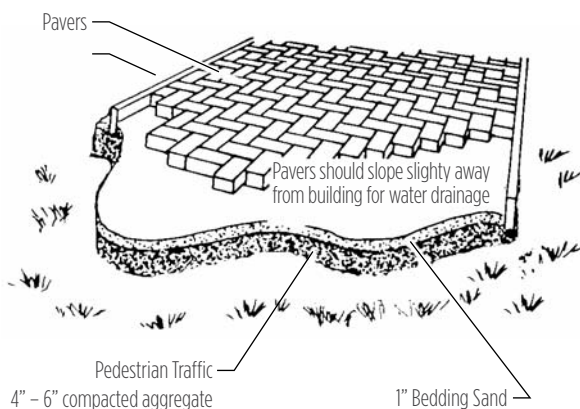

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.



Nicolock's Paver-Shield™

- Ultra-dense surface with more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are guaranteed not to fade!

CAUTION: Always use a plate compactor with a pad when installing textured paving stones.

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.