

OLDE TOWNE COMBO AND OLDE TOWNE 1/2



Multi-size Ashlar pattern with textured surface and antiqued edges.
No spacer lugs needed.

Toscana





Olde Towne Combo | Color: Oyster Blend



OLDE TOWNE COMBO AND OLDE TOWNE 1/2

	WIDTH	LENGTH	THICKNESS	PCS / SF	SF / PALLET	PCS / PALLET	LBS / PALLET
Olde Towne 1/2							
A	4¾"	9½"	2¾"	3.2	111	360	3,313
Olde Towne Combo							
B	9½"	9½"	2¾"	1.6	111	72	3,542
C	9½"	14⅜"	2¾"	1.1		72	

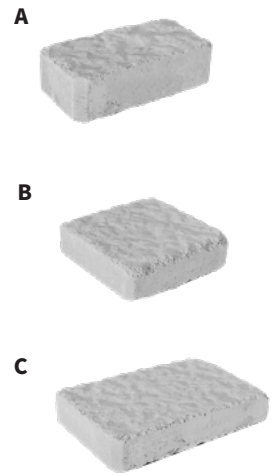

Charcoal



Granite City Blend




Oyster Blend*

*Premium Colors


INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" – 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

CROSS-SECTION OF TYPICAL INSTALLATION

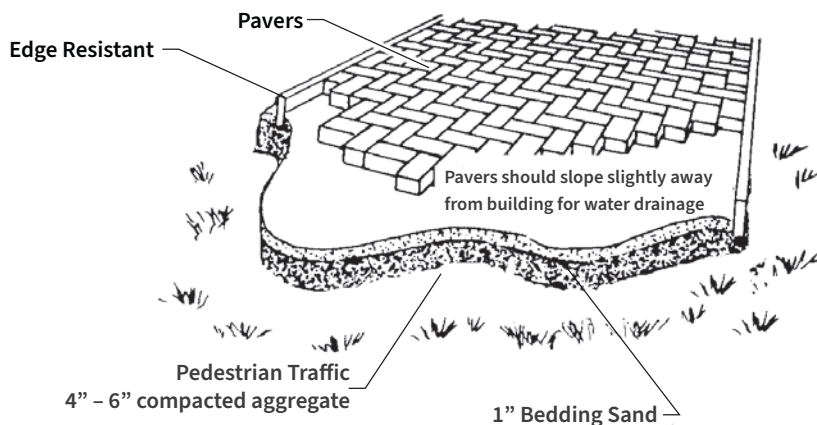

NICOLOCK PAVING STONE 1"-31/8" THICK

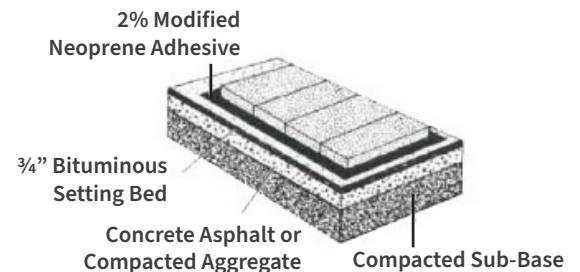

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.

