

The Mosaic

Like the artwork it's named after, these multi-sized, irregular shapes of textured stone create a whimsical, striking border, path, or accent.



Inlays | Borders | Circles

paver-shield™ has a tight, smooth surface texture and will not expose heavy aggregate as it wears. Ultra-dense surface has more color and more protection. Nicolock has color from top to bottom throughout the paver ensuring a lifetime of beauty. Iron oxide pigments are **guaranteed not to fade!**



Granite City Blend



The Mosaic

| | WIDTH | LENGTH | THICKNESS | SF/PALLET | PCS/PALLET | LBS/PALLET |
|----------|--------|--------|-----------|-----------|------------|------------|
| A | 4 1/4" | 5 3/4" | 2 3/8" | 101 | 576 | 2,126 |
| B | 4 1/4" | 3 1/8" | 2 3/8" | | | |
| C | 4 1/4" | 4 3/4" | 2 3/8" | | | |
| D | 4 1/4" | 2 7/8" | 2 3/8" | | | |

Sizes not sold separately



CHARCOAL



GRANITE CITY BLEND



GRAPHITE PEARL BLEND*



OYSTER BLEND*



RAVEN*




*Premium Color


INSTALLATION GUIDELINES: SAND

After excavation, compact the sub grade and install a woven separation fabric if needed. Spread and compact a base of clean, dense graded aggregate (road base). Typical compacted base thickness is 4-6" for pedestrian applications. Pavers are set on a loosely screened 1" bed of graded, clean concrete sand. Maintain a joint size of 1/16" – 3/16". When pavers are set, compact paving stones into sand with mechanical plate vibrator. Joint sand may be spread over paving stones during compaction. Installed pavers should be set 1/8" to 1/4" above final elevations to compensate for any potential settlement. Spread clean dry sand over surface and broom sweep to fill joints. Run vibrator one final time after filling joints.

CROSS-SECTION OF TYPICAL INSTALLATION

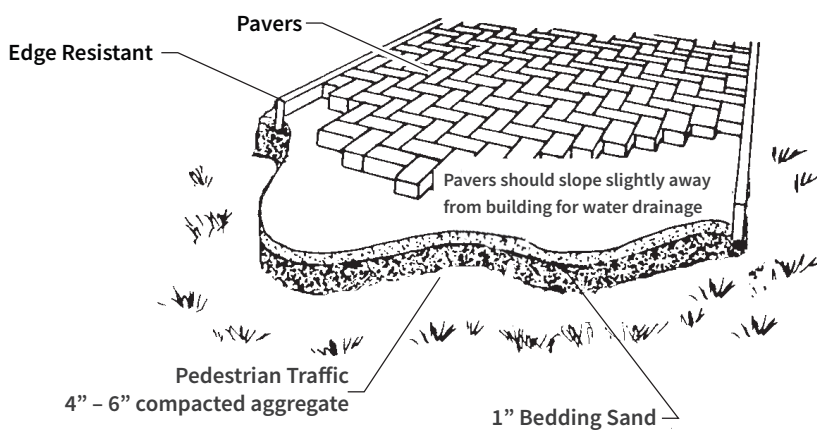

NICOLOCK PAVING STONE 1"-31/8" THICK

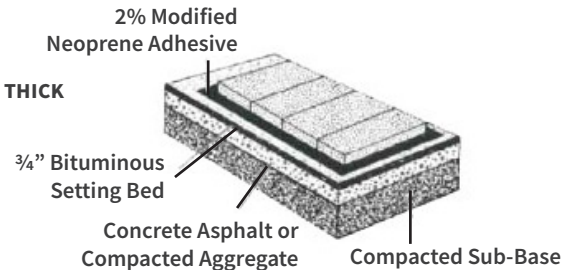

NOTE: All measurements are nominal. Variance in square footage or linear footage coverage can be up to 5% depending on joint width. The possible occurrence of efflorescence does not affect the structural integrity of the product. Efflorescence is a normal occurrence in concrete products and will dissipate with normal weathering. The use of concrete as a base or setting bed may increase the possibility of efflorescence.

CAUTION: Always use a plate compactor with a pad when installing any textured paving stone.



Corporate HQ: 612 Muncy Avenue | Lindenhurst | NY | 11757 | 631.669.0700 | nicolock.com

